

Potências e torques

Modelo	Carcaça	CV	Redução	Torque (Kgf.m)
R27	71	0,75	44,90	12,82
R27	71	0,75	61,3	17,50
R37	80	1,5	22,27	12,71
R37	80	1,5	36,72	20,96
R57	80	1,5	90,55	51,70
R27	90	3	11,86	13,54
R47	90	3	23,28	26,58
R47	90	3	29,88	34,12
R47	90	3	42,87	48,95
R57	90	3	53,22	60,77
R47	100	5	11,79	22,44
R57	100	5	21,93	41,73
R77	100	5	29	55,19
R77	100	5	45,81	87,18
R87	100	5	93,38	177,71
R77	112	7,5	36,83	105,13
R87	112	7,5	63,68	181,78
R57	132	15	14,77	84,32
R87	132	15	27,88	159,17
R87	132	15	41,74	238,30

Dimensões de montagem

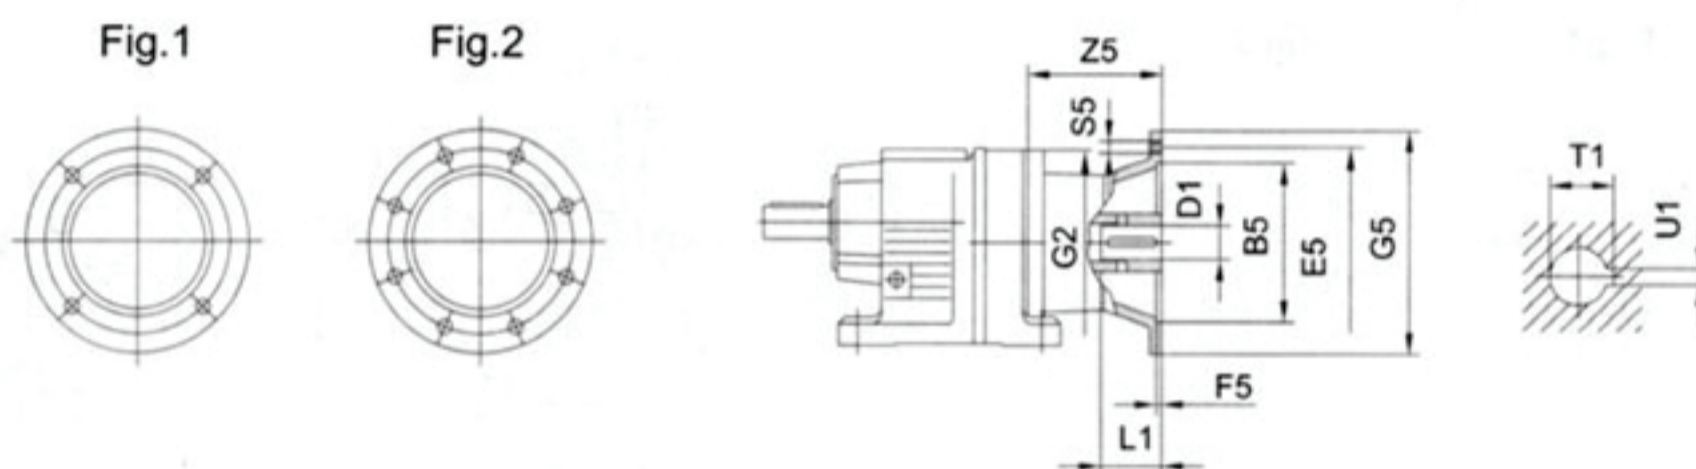


		Fig	B5	E5	F5	G2	G5	S5	Z5	D1	L1	T1	U1
XDR..27 XDR..37	AM63	1	95	115	3.5	120	140	M8	72	11	23	12.8	4
	AM71 <sup>1)</sup>		110	130			14			30	16.3	5	
	AM80 <sup>1)</sup>		130	165	4.5		200	M10	106	19	40	21.8	6
	AM90 <sup>1)</sup>						24			50	27.3	8	
XDR..47 XDR..57 XDR..67	AM63	1	95	115	3.5	160	140	M8	66	11	23	12.8	4
	AM71		110	130			14			30	16.3	5	
	AM80		130	165	4.5		200	M10	99	19	40	21.8	6
	AM90						24			50	27.3	8	
	AM100 <sup>1)</sup>		180	215	5		250	M12	134	28	60	31.3	8
	AM112 <sup>1)</sup>		230	265	5		300			38	80	41.3	10
XDR..77	AM63	1	95	115	3.5	200	140	M8	60	11	23	12.8	4
	AM71		110	130			14			30	16.3	5	
	AM80		130	165	4.5		200	M10	92	19	40	21.8	6
	AM90						24			50	27.3	8	
	AM100 <sup>1)</sup>		180	215	5		250	M12	126	28	60	31.3	8
	AM112 <sup>1)</sup>						300			179	38	80	41.3
	AM132S <sup>1)</sup> AM132M <sup>1)</sup>		230	265	5		300	M12	174	38	80	41.3	10
	AM132ML <sup>1)</sup>		250	300	6		350			M16	232	42 48	110
XDR..87	AM80	1	130	165	4.5	250	200	M10	87	19	40	21.8	6
	AM90						24			50	27.3	8	
	AM100		180	215	5		250	M12	121	28	60	31.3	8
	AM112						300			174	38	80	41.3
	AM132S AM132M		230	265	5		300	M12	169	38	80	41.3	10
	AM132ML		250	300	6		350			M16	227	42 48	110
	AM160 <sup>1)</sup> AM180 <sup>1)</sup>		250	300	6		350	M16	268	55			59.3
AM200	300	350	7	400	M16	283	60			140	64.4	18	
AM225 <sup>1)</sup>	350	400	7	450									